



## **AT38-16M1520F**

### **SPECIFICATION OF CRYSTAL RESONATOR**

This specifications is subject to change without notice.  
Reprinting and copying of this specifications without prior written  
permission from MOBICON HOLDINGS LTD are not permitted.

**[www.mobicon.com](http://www.mobicon.com)**

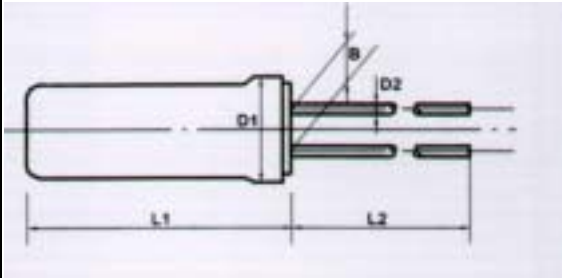
7/F., New Trend Centre, 704 Prince Edward Road East, San Po Kong, Kowloon, Hong Kong.

**MEC**

## Electrical Specifications:

ITEM	Specification
Nominal Frequency	16.000MHz
Storage Temperature Range	-30°C to +80°C
Operating Temperature Range	-20°C to +70°C
Frequency Stability over Operating Temperature	+/-20 ppm
Resonance Resistance(R)	40Ω max.
Load Capacitance(CL)	15pF
Shunt Capacitance (Co)	7.0pF max
Frequency vs temperature	+/-50ppm at -10°C to +60°C
Drive Level	10 uW
Aging	+/-5.0 ppm/year @25°C
Insulation Resistance	500M Ω min at DC 100V

## Mechanical Dimensions (mm):

	L1	L2	D1	D2	B
		8.0	10.0	3.1	0.3



**MEC**