


MIEC

SPECIFICATION OF CRYSTAL UNIT

1. Nominal Frequency	75 kHz
2. Holder Type	DT 26
3. Frequency Tolerance	± 30 ppm @ 25 °C
4. Series Resistance	40k Ohm max.
5. Storage Temperature Range	-20 °C to +70 °C
6. Shunt Capacitance	1pF \pm 0.3pF
7. Operating Temperature Range	-10 °C to +60 °C
8. Turnover Temperature	25 °C \pm 5 °C
9. Loading Capacitance	12.5pF
10. Drive Level	1 μ W max.
11. Insulation Resistance	100M Ohm at 100 V _{DC}

D I M E N S I O N s (mm)

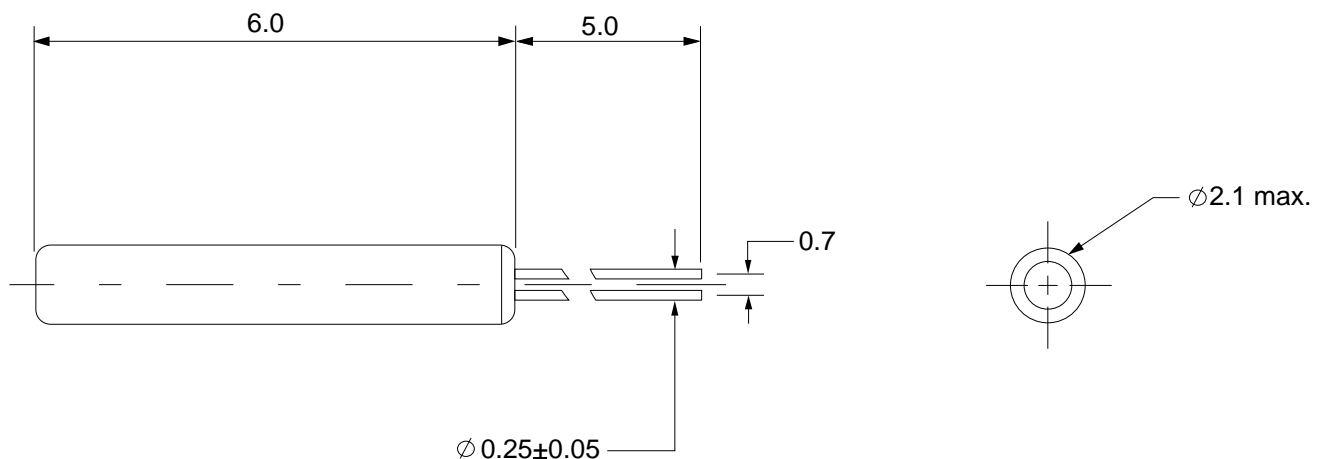

Prepared by: Leo Wong
Checked By: _____
DOC. No: DT26-75k12_5pF30ppm