


MIEC

SPECIFICATION OF CRYSTAL UNIT

1. Nominal Frequency	32.768 MHz
2. Holder Type	HC49S
3. Frequency Tolerance	± 30 ppm at 25°C
4. Equivalent Resistance	100 Ohm max.
5. Insulation Resistance	500M Ohm @100V _{DC}
6. Operating Temperature Range	-10 ~ +60°C
7. Storage Temperature Range	-20 ~ +80°C
8. Temperature Tolerance	± 50 ppm at -20 ~ +80°C
9. Loading Capacitance	20pF
10. Drive Level	100uW
11. Aging	± 5 ppm/ year
12. Oscillation Mode	Third Overtone

DIMENSIONS (mm)

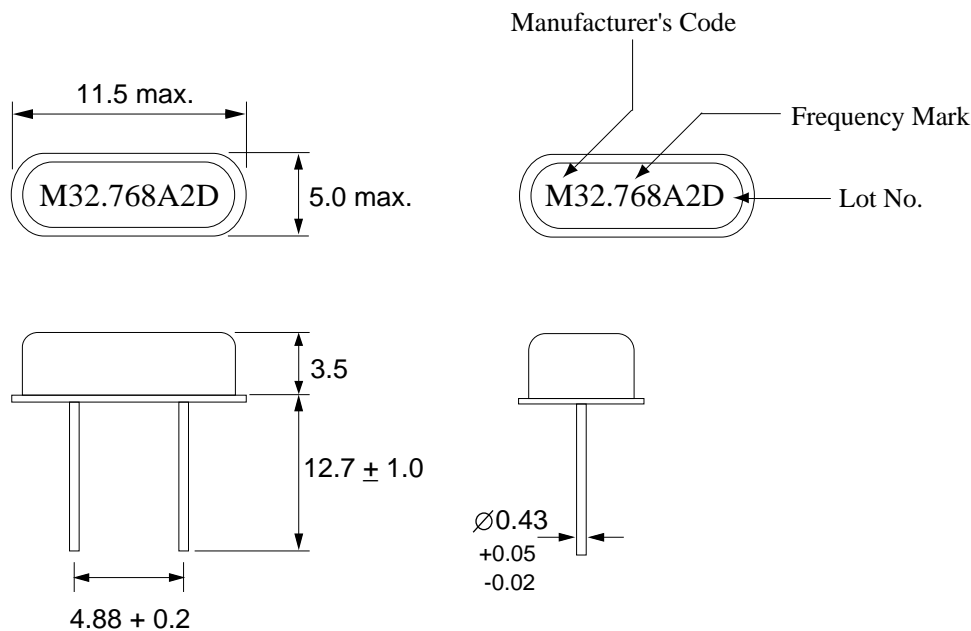

Prepared by: Leo Wong

DOC. No: HC49S-32_768M20pF30ppmT

MIEC

SPECIFICATION OF CRYSTAL UNIT

No.	Item	Condition of Test
1	Drop Test	Dropping from 75cm height, 3 times on hard wooden board.
2	Vibration Test	30 minutes in each direction 10 to 55 Hz, amplitude 0.7 ~ 0.9mm Variation: Frequency drift < ± 20 ppm
3	Solderability	The dipping surface of the lead shall be at least 95% Covered with a Continuous new solder coating. Condition of test: Temperature of solder bath: $230^{\circ}\text{C} \pm 5^{\circ}\text{C}$ Dipping time: 5 sec.
4	Leakage	No bubbles coming up from interior of the holder. Insulation resistance: More than 500M Ohm Condition of test: Temperature of hot water: $90^{\circ}\text{C} \sim 95^{\circ}\text{C}$ Test time: 3 min.

REVIEW OF SPECIFICATIONS

- 1) When something get doubtful with this specifications, we shall jointly work to get an agreement.
- 2) This specification limits the quality of the components as a single unit. Please insure the component is thoroughly evaluated in your application circuit.
- 3) Please do not use this component in any application that deviates from its intended use as noted within the specification. It may cause any mishaps.
- 4) Please return one of this specification after your signature of acceptance. In case of no return within 3 months from submission date. This specification should be treated as accepted.



Prepared by: Leo Wong
DOC. No: HC49S