


MIEC™

SPECIFICATION OF CRYSTAL UNIT

1. Nominal Frequency	28.375 MHz
2. Holder Type	HC49S SMD Type
3. Frequency Tolerance	± 30 ppm at 25°C
4. Equivalent Resistance	40 Ohm max.
5. Insulation Resistance	500M Ohm @100V _{DC}
7. Operating Temperature Range	-10 ~ +60 C
8. Storage Temperature Range	-20 ~ +70°C
9. Temperature Tolerance	± 30 ppm at -20 ~ +80°C
10. Loading Capacitance	20pF
11. Drive Level	100uW
12. Aging	± 5 ppm/ year
13. Oscillation Mode	Fundamental

DIMENSIONS (mm)

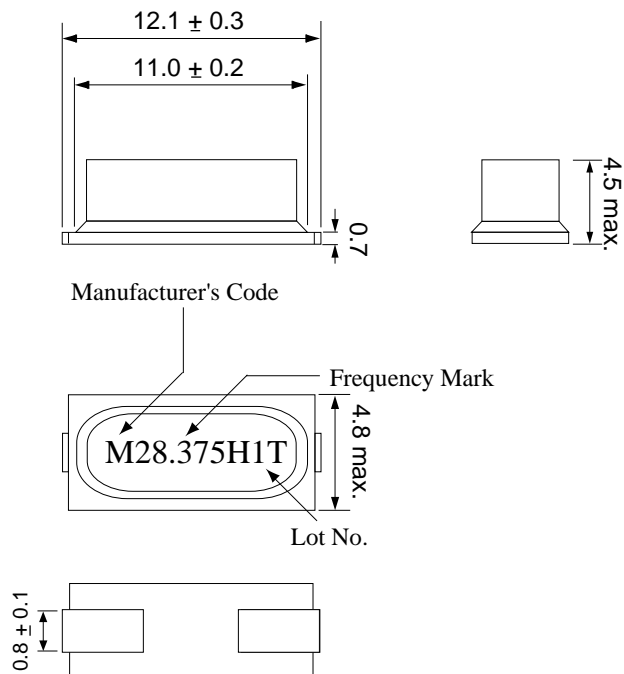

Prepared by: Leo Wong

Checked By: _____

DOC. No: SMD49S-28_375MHz20pF30ppm