

MOBICON

Electronic Components

PRODUCT SPECIFICATION

MEC QUARTZ CRYSTAL

FREQUENCY COMPONENTS

SMD49S Series QUARTZ CRYSTAL SPECIFICATION

MOBICON HOLDINGS LTD.		
Prepared By	Sign.	Approved By
Leo Wong		C.H. Wong

www.mobicon.com

MIEC

SPECIFICATION OF CRYSTAL UNIT


PART NO. :

SMD49S-3.579545M2030F

ELECTRICAL CHARACTERISTICS

1. Nominal Frequency	3.579545 kHz
2. Holder Type	SMD49S
3. Frequency Tolerance	± 30 ppm
4. Equivalent Series Resistance	200 Ohm max.
5. Insulation Resistance	500M Ohm @100V _{DC}
6. Temperature Tolerance	+/- 50ppm at -20 ~ +70°C
7. Operating Temperature Range	-20 ~ +70°C
8. Storage Temperature Range	-20 ~ +70°C
9. Loading Capacitance	20pF
10. Drive Level	100uW max.
11. Aging	± 5 ppm/ year max.
12. Oscillation Mode	Fundamental
13. Shunt Capacitance	7pF

DIMENSIONS (mm)

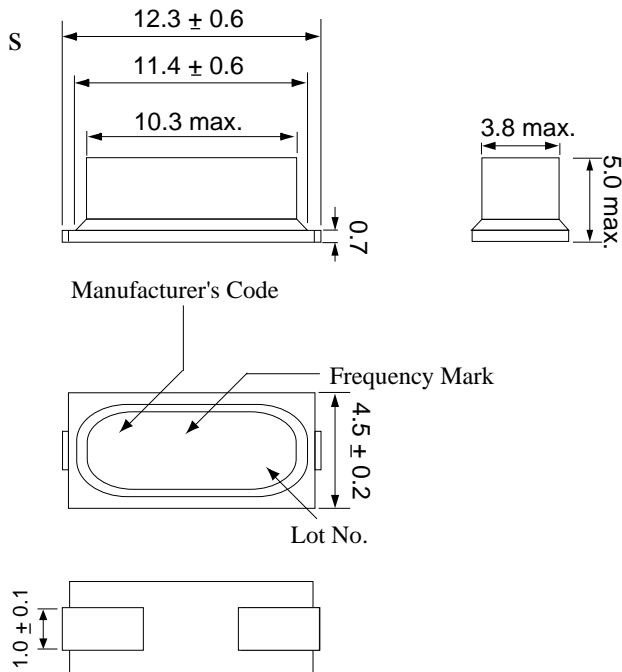

Prepared By: Leo Wong

DOC. No: SMD49S-3.579545MHz20pF30ppmF

MIEC

SPECIFICATION OF CRYSTAL UNIT

No.	Item	Condition of Test
1	Drop Test	Dropping from 80cm height to 3cm height, 3 times max. on wooden board.

REVIEW OF SPECIFICATIONS

- 1) When something get doubtful with this specifications, we shall jointly work to get an agreement.
- 2) This specification limits the quality of the components as a single unit. Please insure the component is thoroughly evaluated in your application circuit.
- 3) Please do not use this component in any application that deviates from its intended use as noted within the specification. It may cause any mishaps.
- 4) Please return one of this specification after your signature of acceptance. In case of no return within 3 months from submission date. This specification should be treated as accepted.

CAUTION! Ultra-Sonic Bonding is highly not recommended when assembling this components on PCB and MOBICON GROUP will not accept any rejects/ claims/re-changes and responsible for any damages about our crystals after this handling method.



Prepared By: Leo Wong
DOC. No: SMD49S